

DECENTRALISED HEAT RECOVERY UNIT

APPLICATION

Decentralised Mechanical Ventilation unit, with alternate flow and heat recovery core ("push-pull" type), **available in Ø100mm and Ø150mm**: extremely low energy consumption.

For installation in single room such as living room and bedroom: for a better flow balancing two units are commonly used in parallel operation, having opposite and synchronised flows. Suitable for mounting on perimetral walls.

Ideal solution for removal of CO₂ or any other indoor volatile pollutants and to prevent condensation and mould problems which inevitably damage the building as well as the occupants' health.

SPECIFICATION

Internal ventilation unit made of high quality ABS providing long lasting shock-proof and robust construction. The unit is finished in white RAL 9010 and are UV resistant.

Unique design winglet-type impeller, providing enhanced aerodynamic properties, low noise and increased efficiency.

High efficient reversible EC motor with integral thermal protection, mounted on sealed for life high quality ball bearings. Designed for continuous running.

Anti-dust filter removable from inside by the tenant for maintenance.

Regenerative heat exchanger with ceramic core; high thermal efficiency (up to 90%).

Telescopic pipe adaptable to the wall thickness.

FEATURES & BENEFITS

IPX4 protection degree.

Aesthetic flat front cover for modern interior design, easily removable for cleaning without the need of tools.

Alternate flow with flow reversal approx. every 70 seconds.

Free cooling to prevent heat exchange when not requested.

Integral led to indicate when the "free cooling" option is active.

Simplified synchronisation of the units.

Easy maintenance of the parts, heat exchanger included.

Totally recyclable plastic components, environmentally friendly.

Double insulated: no earth connection is required.

Tested to the latest standards: units are tested in the TÜV Rheinland recognised laboratory at Aerauliqua, meaning accurate, up to date information on electrical safety, performance and noise level that can be relied upon. Designed and manufactured in accordance with EN60335-2-80 (Low Voltage Directive) and the EMC Directive (Electromagnetic Compatibility).

OPERATION

Multi-Speed: operation speed can be selected among 3 options.

Automatic speed increase via ambient sensor like SEN-HY, SEN-PIR or SEN-CO₂.

Dedicated control panel (CTRL-S, on request), highly recommended, or controllable via standard switches.

VERSIONS


Standard

Equipped with external fixed grille with anti-insect net.

PRO

Equipped with external weatherproof aluminium hood, finished in white RAL9010, acoustically lined and with anti-insect net.

Example of a complete ventilation system

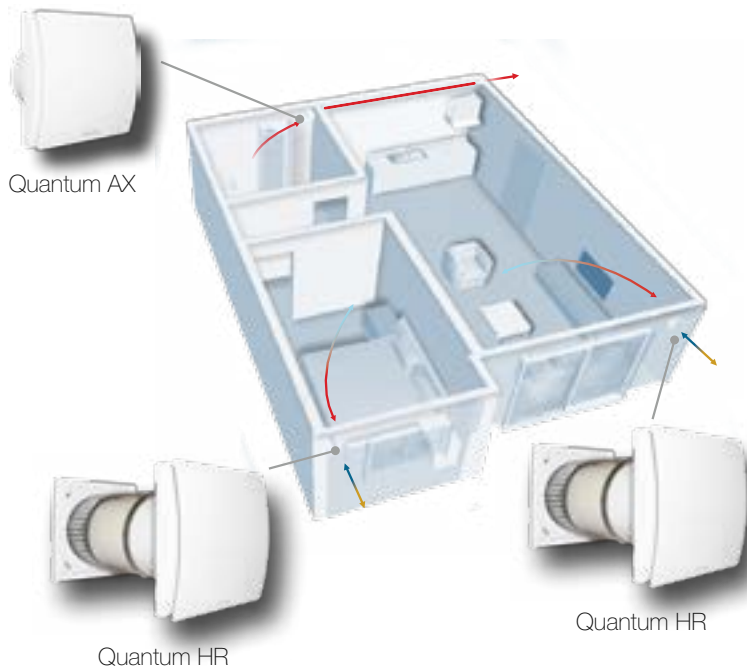

Application: ideal solution in case of renovation.


How it works: a continuous running decentralised heat recovery units (Quantum HR) transfer thermal energy from air extracted from indoor rooms to incoming fresh air. Two units can work synchronised with balanced air flows and top acoustic comfort.

The system can also include a single flow decentralised unit (Quantum AX) mounted in the wet room. No air distribution system is needed.

Energy saving: the preheated supplied fresh air and continuous air changes reduce the demand for additional heating. Quantum HR and Quantum AX are equipped with EC brushless motors which significantly reduce the electricity consumption.

Indoor Air Quality: a correctly specified mechanical ventilation system can ensure the quality of the indoor air is constantly maintained for the health and well-being of the occupants as well as of the building. Duly maintained filters on Quantum HR ensure that incoming air is suitably filtered before it enters the home.

Dimensions (mm) and Weight

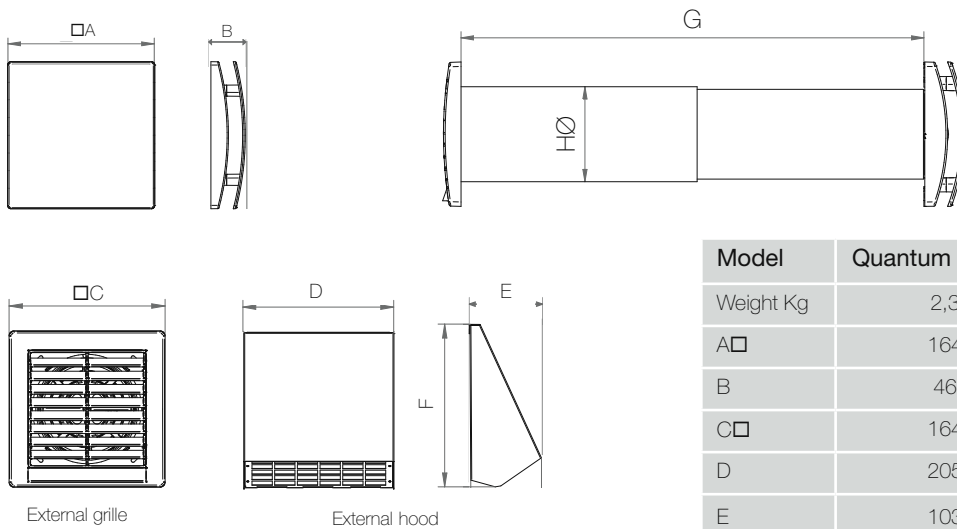


| Model | Quantum HR 100 | Quantum HR 150 |
|-----------|----------------|----------------|
| Weight Kg | 2,3 | 3,9 |
| A □ | 164 | 218 |
| B | 46 | 51 |
| C □ | 164 | 218 |
| D | 205 | 252 |
| E | 103 | 114 |
| F | 209 | 262 |
| G | 270÷510 | 300÷560 |
| H Ø | 108 | 158 |


Article code

| Model | Quantum HR 100 | Quantum HR 150 | Quantum HR 100PRO | Quantum HR 150PRO |
|-------|----------------|----------------|-------------------|-------------------|
| Code | 001006 | 001007 | 001008 | 001009 |

Quantum HR

Product fiche - ErP Directive, Regulations 1253/2014 - 1254/2014

| | | | |
|-----|---|-----------------------|--|
| a) | Mark | - | AERAULIQA |
| b) | Model | - | QUANTUM HR 100 |
| c) | SEC class | - | A |
| c1) | SEC warm climates | kWh/m ² .a | -15,6 |
| c2) | SEC average climates | kWh/m ² .a | -37,5 |
| c3) | SEC cold climates | kWh/m ² .a | -75,6 |
| | Energy label | - | Yes |
| d) | Unit typology | - | Residential - bidirectional |
| e) | Type of drive | - | Multi-speed drive |
| f) | Type of Heat Recovery System | - | Heat recovery |
| g) | Thermal efficiency of heat recovery | % | 74 |
| h) | Maximum flow rate @ 0 Pa | m ³ /h | 25 |
| i) | Electric power input @ maximum flow rate | W | 2,6 |
| j) | Sound power level (L _{WA}) | dBA | 35 |
| k) | Reference flow rate | m ³ /h | 17 |
| l) | Reference pressure difference | Pa | 10 |
| m) | Specific power input (SPI) | W/m ³ /h | 0,071 |
| n1) | Control factor | - | 1 |
| n2) | Control typology | - | Manual control (no DCV) |
| o1) | Maximum internal leakage rate | % | N/A |
| o2) | Maximum external leakage rate | % | 1% |
| p1) | Internal mixing rate | % | N/A |
| p2) | External mixing rate | % | N/A |
| q) | Visual filter warning | - | N/A |
| r) | Instructions to install regulated grilles | - | N/A |
| s) | Internet address for preassembly/disassembly instructions | - | www.aerauliqa.com |
| t) | Airflow sensitivity to pressure variations | % | N/A |
| u) | Indoor/outdoor air tightness | m ³ /h | 21 |
| v1) | AEC - Annual electricity consumption - warm climates | kWh | 1 |
| v2) | AEC - Annual electricity consumption - average climates | kWh | 1 |
| v3) | AEC - Annual electricity consumption - cold climates | kWh | 1 |
| w1) | AHS - Annual heating saved - warm climates | kWh | 18 |
| w2) | AHS - Annual heating saved - average climates | kWh | 39,9 |
| w3) | AHS - Annual heating saved - cold climates | kWh | 78 |
| | Air-flow at different speed | m ³ /h | 25/15/10 |
| | Power consumption at different speed | W | 2,6/1,7/1,2 |
| | Sound pressure @ 3m* at different speed | dB(A) | 29/15/10 |
| | Thermal efficiency | % | 70/74,3/82 |
| | Ambient temperature max | °C | -20° +50° |
| | Degree of protection IP | - | X4 |
| | Marking | - | CE  |

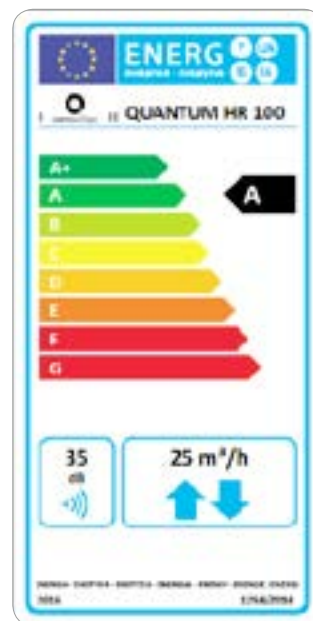

- 220-240 V ~ 50-60Hz - Air performance measured according to ISO 5801 a 230V 50Hz, air density 1,2 Kg/m³


- data measured in the TÜV Rheinland recognised laboratory in Aerauliqa


(1) sound pressure level @ 3m in free field, for comparative purposes only

(2) Measured at the independent laboratory HLK of the University of Stuttgart (Germany)



Product fiche - ErP Directive, Regulations 1253/2014 - 1254/2014

| | | | |
|-----|---|-----------------------|--|
| a) | Mark | - | AERAULIQA |
| b) | Model | - | QUANTUM HR 150 |
| c) | SEC class | - | A |
| c1) | SEC warm climates | kWh/m ² .a | -16,2 |
| c2) | SEC average climates | kWh/m ² .a | -38,2 |
| c3) | SEC cold climates | kWh/m ² .a | -76,4 |
| | Energy label | - | Yes |
| d) | Unit typology | - | Residential - bidirectional |
| e) | Type of drive | - | Multi-speed drive |
| f) | Type of Heat Recovery System | - | Heat recovery |
| g) | Thermal efficiency of heat recovery | % | 74 |
| h) | Maximum flow rate @ 0 Pa | m ³ /h | 60 |
| i) | Electric power input (alla Maximum flow rate) | W | 3,8 |
| j) | Sound power level (L _{WA}) | dBA | 38 |
| k) | Reference flow rate | m ³ /h | 41 |
| l) | Reference pressure difference | Pa | 10 |
| m) | Specific power input (SPI) | W/m ³ /h | 0,054 |
| n1) | Control factor | - | 1 |
| n2) | Control typology | - | Manual control (no DCV) |
| o1) | Maximum internal leakage rate | % | N/A |
| o2) | Maximum external leakage rate | % | 1% |
| p1) | Internal mixing rate | % | N/A |
| p2) | External mixing rate | % | N/A |
| q) | Visual filter warning | - | N/A |
| r) | Instructions to install regulated grilles | - | N/A |
| s) | Internet address for preassembly/disassembly instructions | - | www.aerauliqa.com |
| t) | Airflow sensitivity to pressure variations | % | N/A |
| u) | Indoor/outdoor air tightness | m ³ /h | 60 |
| v1) | AEC - Annual electricity consumption - warm climates | kWh | 0,7 |
| v2) | AEC - Annual electricity consumption - average climates | kWh | 0,7 |
| v3) | AEC - Annual electricity consumption - cold climates | kWh | 0,7 |
| w1) | AHS - Annual heating saved - warm climates | kWh | 18,1 |
| w2) | AHS - Annual heating saved - average climates | kWh | 40 |
| w3) | AHS - Annual heating saved - cold climates | kWh | 78,2 |
| | Air-flow at different speed | m ³ /h | 60/40/20 |
| | Power consumption at different speed | W | 3,8/2,3/1,4 |
| | Sound pressure @ 3m ⁽¹⁾ at different speed | dB(A) | 26/18/10 |
| | Thermal efficiency ⁽²⁾ | % | 70/74,3/82 |
| | Ambient temperature max | °C | -20° +50° |
| | Degree of protection IP | - | X4 |
| | Marking | - | CE  |

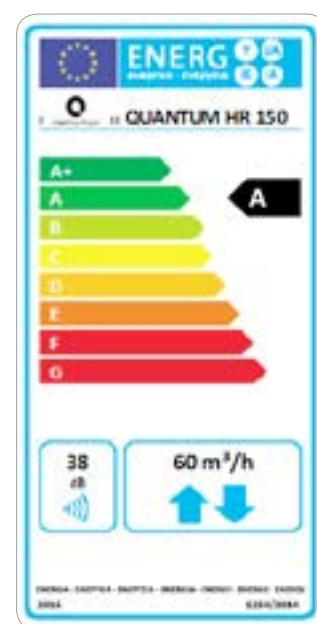

- 220-240 V ~ 50-60Hz - Air performance measured according to ISO 5801 a 230V 50Hz, air density 1,2 Kg/m³

- data measured in the TÜV Rheinland recognised laboratory in Aerauliqa


(1) sound pressure level @ 3m in free field, for comparative purposes only

(2) Measured at the independent laboratory HLK of the University of Stuttgart (Germany)



Quantum HR

Details

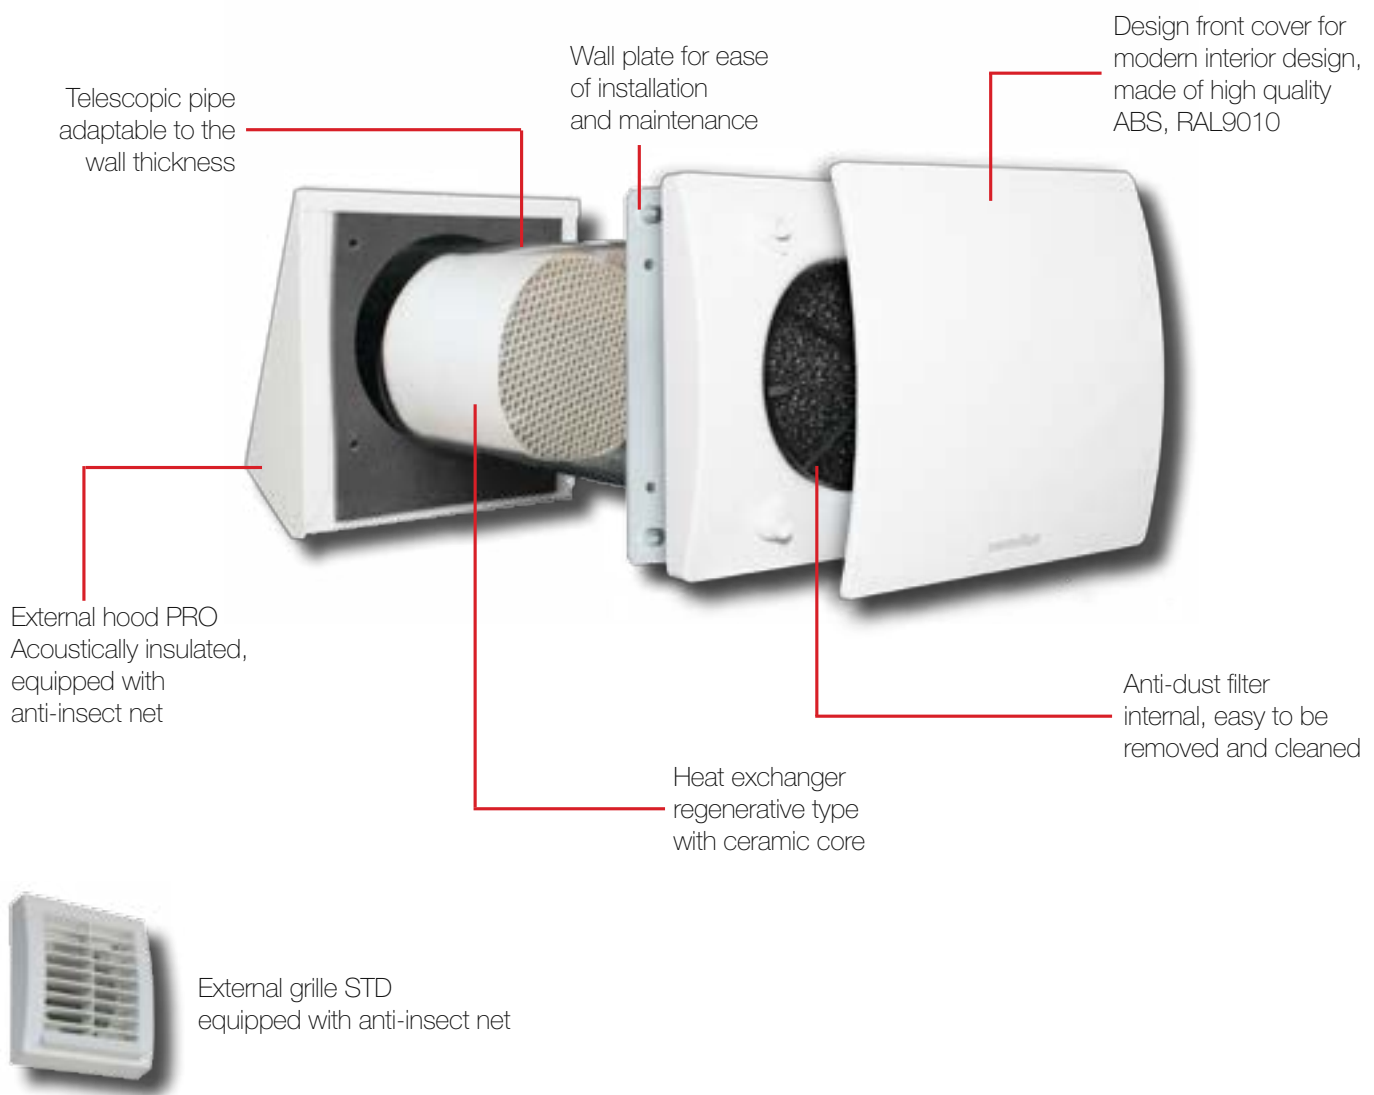

Multi-speed operation through CTRL-S :

- 3 speeds
- Free-cooling option (bypass) with LED indicator (extract or intake)
- Automatic speed increase by means of ambient sensors (SEN-HY, SEN-PIR or SEN-CO2)
- Control up to 10 units at the same time
- Automatic reset of the flows synchronisation of two or more units, even after one or more units have been switched off or are turned from free-cooling operation to heat exchange
- Surface or recessed mounting



CTRL-S